

SOLUTIONS™


Ford 3.0L OHV V6 Oil Pan Gaskets

ISSUE:

Ford 3.0L OHV V6 “Vulcan” engines manufactured between March 27, 1990 and 2001, and used in the Ford Taurus and Mercury Sable, have problems with the original-equipment (OE) oil pan gaskets leaking.

RESOLUTION:

MAHLE Original offers an improved molded rubber replacement oil pan gasket for the Ford 3.0L OHV V6 “Vulcan” engine that is superior to the OE floppy gasket design. The molded rubber gasket is comprised of molded silicone rubber applied to a plastic carrier with metal load limiters to extend service life. The gasket also includes four tabs that attach to the oil pan, allowing for easy installation and eliminating the need for an adhesive.

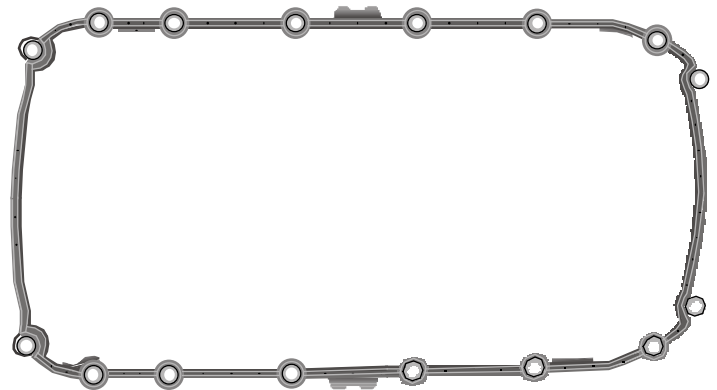

OS32486

APPLICATION:

MAHLE Original part number **OS32486** is available for March 27, 1990 to 2001 and **OS32251** is available for 2002-2008 Ford 3.0L OHV V6 engines. The gasket set includes the gasket, 16 new fasteners, sealant, and detailed installation instructions.

